


R-3D2 R-3D2SR R-3D2SRW5 R-3D2W5



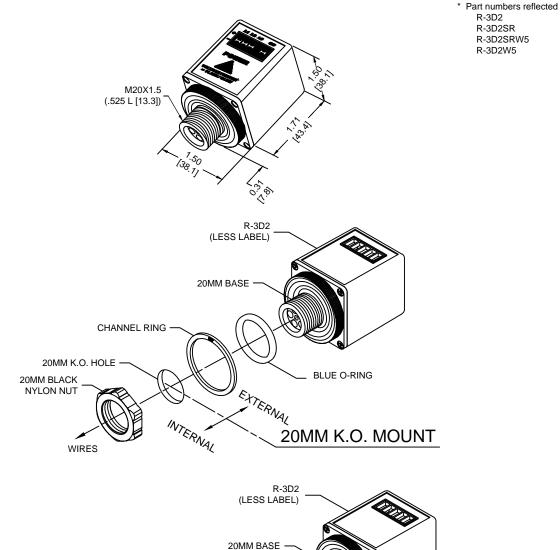

1.086" O.D. UNTHREADED **FLANGE** 

NTERNAL

## NOTE:

1) REFER TO INSTALLATION INSTRUCTIONS FOR PROPER INSTALLATION.

3/4" BLACK

NYLON NUT

- 2) ALWAYS FOLLOW LOCAL ELECTRICAL CODES.
- 3) FOR DETAILED SPECIFICATIONS SEE DATA SHEETS THAT APPLY.

Warning: Verify an electrical conductor has been de-energized using an adequately rated test equipment before working on it. Follow appropriate Energy Control (Lockout/Tagout) procedures as per OSHA Subpart S; the current edition of NFPA 70E; and the current edition of CSA Z462.

WIRES

3/4" K.O. HOLE

GracePort(R) and SafeSide(R) are Registered Trademarks of Grace Engineered Products, Inc. Property of Grace Engineered Products, Inc. (Drawings are subject to change without notification)



**BLUE O-RING** 

**BLUE O-RING** 

3/4" K.O. MOUNT

20MM TO 3/4" K.O. ADAPTOR